


OUT 


Design by Francesc Vilaró



The photograph may not match the reference exactly. Please read the product description to identify the finish.

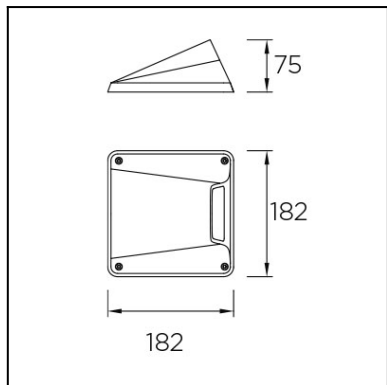

Download photometric file .ldt /.ies

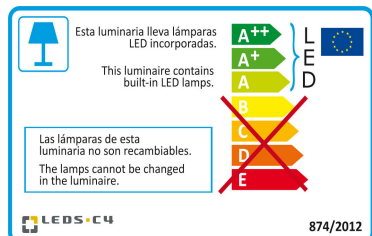

Click on image to download energy label

### TECHNICAL CHARACTERISTICS

Type:	Beacon
Adjustable:	Adjustable from 0° to 15° on the horizontal axis.
IP Protection degrees:	IP67
Light source 1:	4 x LED Cree
Bulb specified at the product label	4.3W Warm White - 3000K 304 lm <sup>(N)</sup> CRI 80
IK Protection degrees:	IK09
Total power consumption (W):	5.5W
Angle of the optics / Reflector:	
Voltage / Frequency:	100-240V/50-60Hz
Warranty:	2
Option to extend the guarantee:	5
Units per box:	8
Net Weight (Kg):	
EAN Code:	8435381414047




### MATERIALS / FINISHES

**Structure material:** High purity aluminium  
**Structure finish:** Urban grey

**Diffuser material:** Methacrylate  
**Diffuser finish:** Transparent



### GEAR

Multi-voltage electronic gear included (Yes)

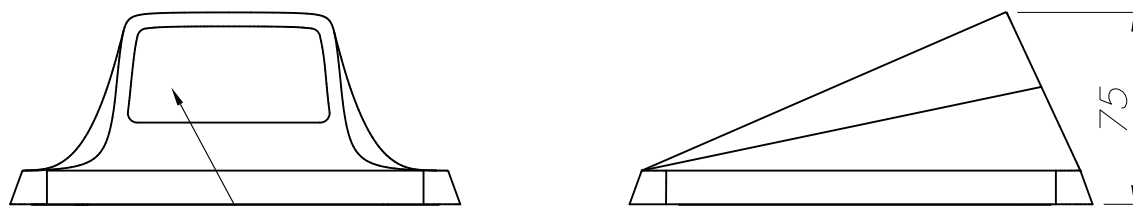

PMMA TRANSPARENTE  
TRANSPARENT PMMA

ALUMINIO INYECTADO  
INJECTED ALUMINIUM

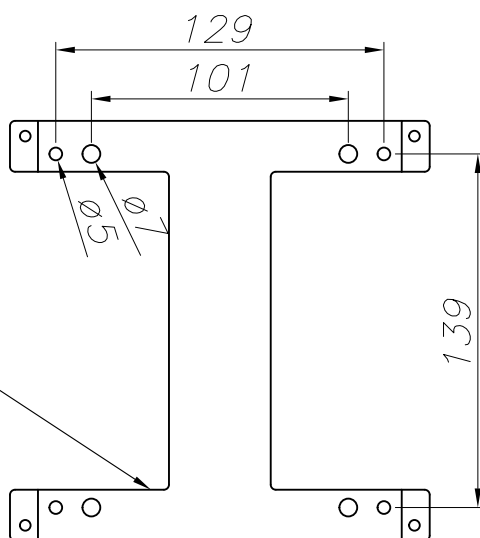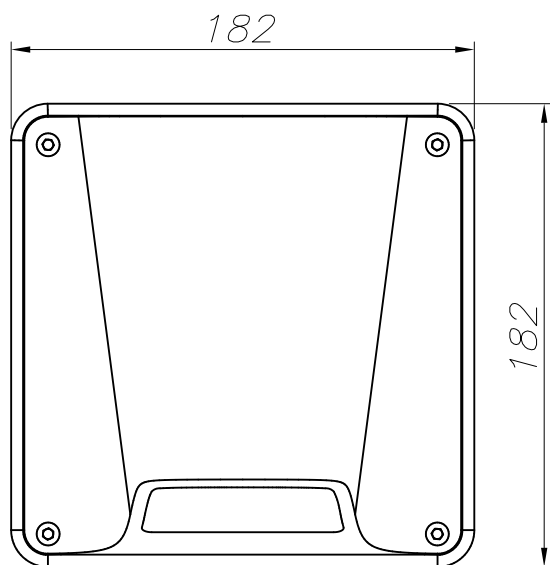

ACERO GALVANIZADO  
GALVANIZED STEEL

PLANTILLA DE INSTALACION  
INSTALLATION TEMPLATE