

OUT 


REXEL

55-9883-Z5-CL


Design by Francesc Vilaró



The photograph may not match the reference exactly. Please read the product description to identify the finish.

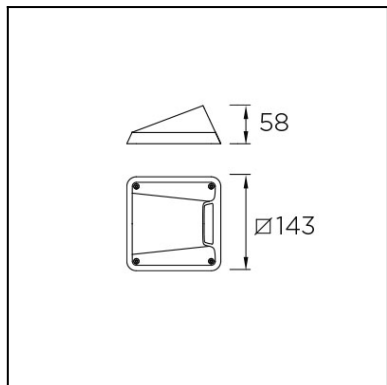

Download photometric file .ldt /.ies

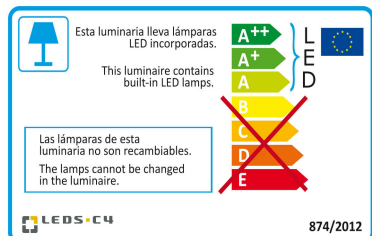

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Beacon
Adjustable:	Adjustable from 0° to 15° on the horizontal axis.
IP Protection degrees:	IP67
Light source 1:	2 x LED Cree
Bulb specified at the product label	2.1W Warm White - 3000K 188 lm ^(N) CRI 80
IK Protection degrees:	IK10
Total power consumption (W):	3.6W
Angle of the optics / Reflector:	
Voltage / Frequency:	100-240V/50-60Hz
Warranty:	2
Option to extend the guarantee:	5
Units per box:	12
Net Weight (Kg):	
EAN Code:	8435381439187




MATERIALS / FINISHES

Structure material: High purity aluminium
Structure finish: Urban grey

Diffuser material: Methacrylate
Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (Yes)

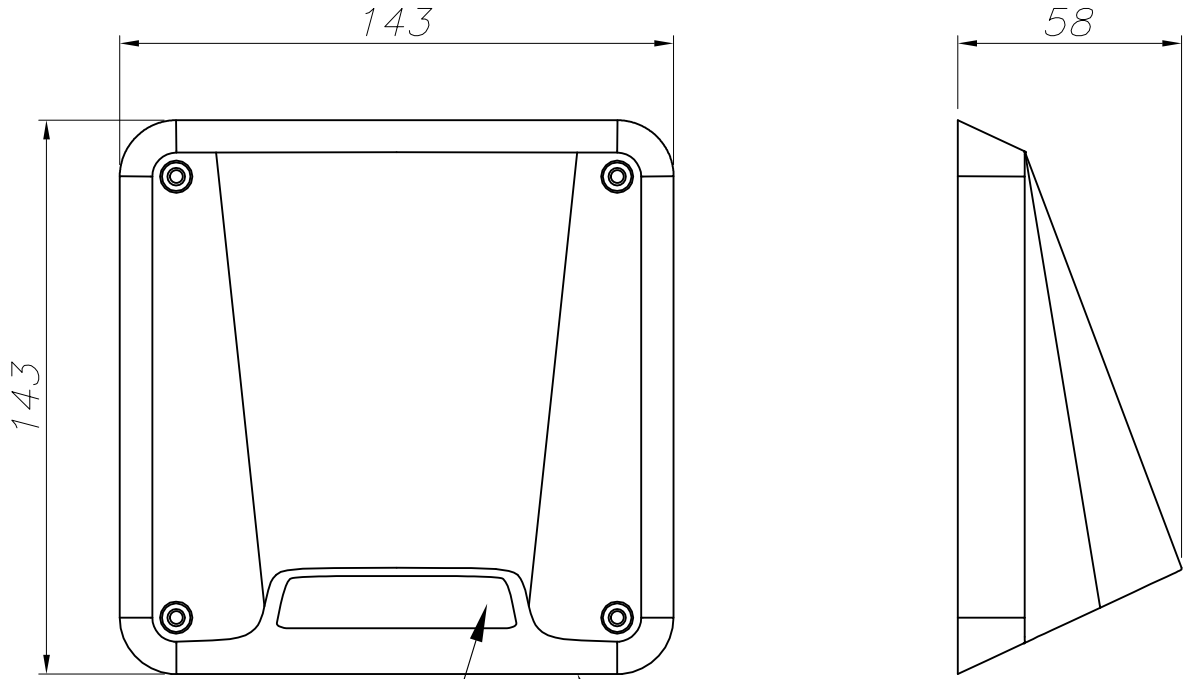

PMMA TRANSPARENTE
TRANSPARENT PMMA

ALUMINIO INYECTADO
INJECTED ALUMINIUM

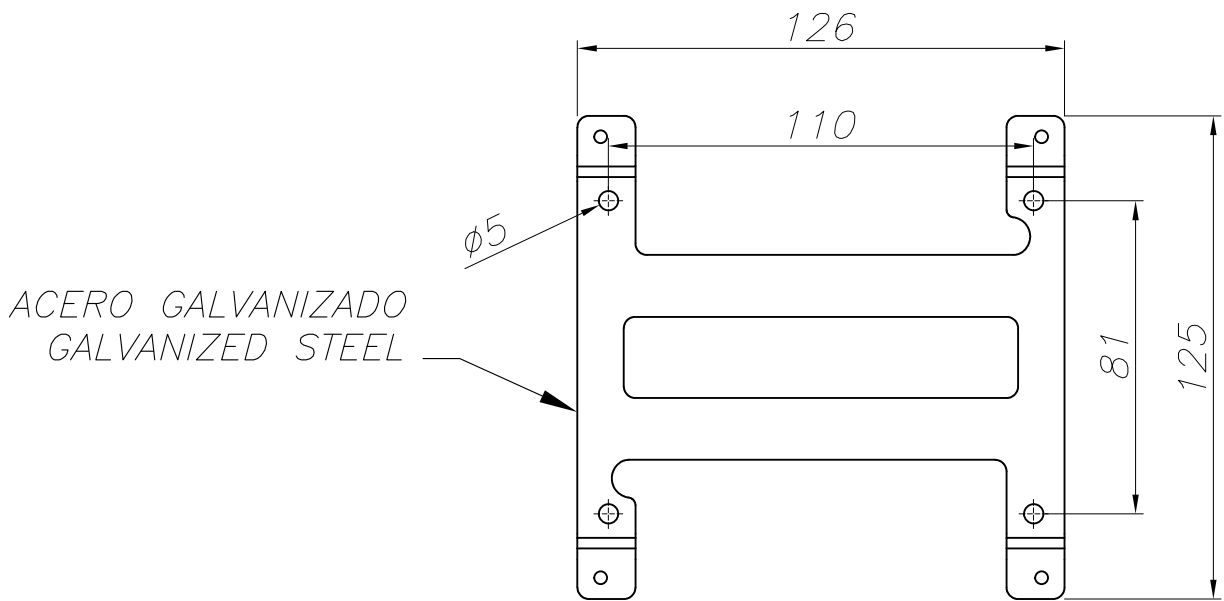

ACERO GALVANIZADO
GALVANIZED STEEL

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE